

# RESOLUTION No. 25-509

#### OF THE BOARD OF SUPERVISORS OF THE COUNTY OF NEVADA

RESOLUTION AUTHORIZING THE PURCHASE OF CAPITAL ASSETS OF TWO AMERICANS WITH DISABILITIES ACT (ADA) ACCESSIBLE CLASS E 24-PASSENGER FORD F550 GASOLINE CUTAWAY BUSES FOR USE IN NEVADA COUNTY CONNECTS FIXED ROUTE SERVICE IN THE AMOUNT OF \$457,568 FROM MODEL 1 COMMERCIAL VEHICLES VIA CALACT/MBTA COOPERATIVE AGREEMENT NO. 20-01 AND AMENDING THE FISCAL YEAR 2025/26 TRANSIT SERVICES BUDGET (4/5 AFFIRMATIVE VOTE REQUIRED) - DISTRICTS I, II, III, IV

WHEREAS, Nevada County Transit Services dba Nevada County Connects provides fixed route transit services throughout Western Nevada County; and

WHEREAS, Transit Services has a fleet of nine 29-foot Class E cutaway transit buses; seven 2016 El Dorado Aero Elite and two 2018 El Dorado Aero Elite; and

WHEREAS, the seven 2016 model year vehicles have all exceeded the Federal Transit Administration (FTA) Useful Life Benchmark for both age and mileage; and

WHEREAS, Transit Services wishes to purchase two ADA-accessible Class E 30-foot Ford F550 Starcraft cutaway buses to replace two similar vehicles currently owned by the Transit Services, and which have exceeded their useful life; and

WHEREAS, Transit Services intends to utilize the existing competitively solicited government contract CalAct/MBTA Cooperative Agreement No. 20-01 to procure the buses; and

WHEREAS, this purchase requires approval of a Capital Asset; and


WHEREAS, Transit Services has sufficient State Transit Assistance (STA) capital funding in the amount of \$457,568 available to claim from the Nevada County Transportation Commission; and

WHEREAS, Transit Services is requesting a budget amendment in the Fiscal Year 2025-26 budget 4281-91003-707-2000 / 540500 for \$457,568.

NOW, THEREFORE, BE IT HEREBY RESOLVED that the Nevada County Board of Supervisors:

- 1. Authorizes the County of Nevada Purchasing Agent to purchase capital assets of two ADA-accessible Class E Ford F550 Starcraft cutaways from Model 1 Commercial Vehicles via the CalAct/MBTA Cooperative Agreement No. 20-01.
- 2. Directs the Auditor-Controller to amend the Fiscal Year 2025/26 Transit Services budget:

4281-91003-707-2000 / 540500 \$457,568 4281-91003-707-2000 / 440170 \$457,568

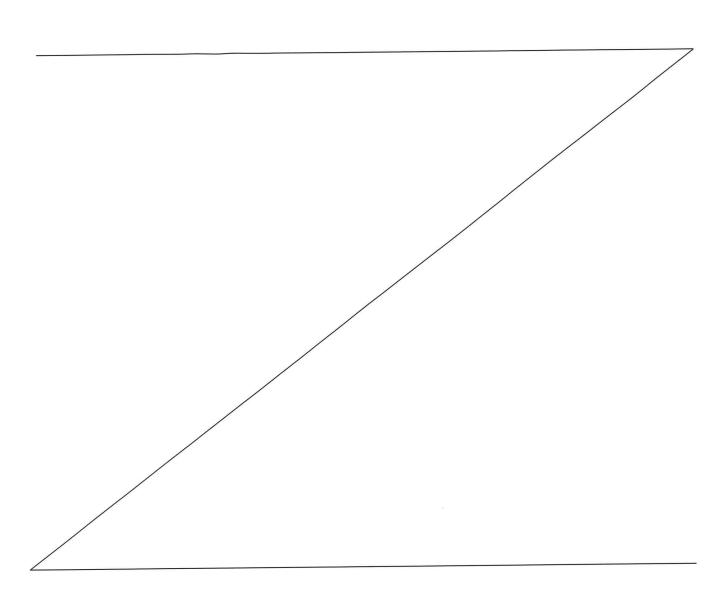

PASSED AND ADOPTED by the Board of Supervisors of the County of Nevada at a regular meeting of said Board, held on the  $28^{th}$  day of October 2025, by the following vote of said Board:

Ayes:

Supervisors Robb Tucker, Lisa Swarthout, Susan Hoek, and

Hardy Bullock.

Noes:

None.

Absent:

Heidi Hall.

Abstain:

None.

Recuse:

None.

ATTEST:

TINE MATHIASEN

Chief Deputy Clerk of the Board of Supervisors

Heidi Hall, Chair





The Nation's Largest Bus Dealership


	CalACT MBTA RFP #20-01 - Class E - Quote		7/24/2025	
Vehicle Type: Class E - Star	craft Bus (Allstar XL)	Date:	7/21/2025	
Contact: Robin VanVa	llkenbough	Lift Info:	BraunAbility - Rear	
Agency: Nevada Cou		Seat Material Level:	Docket 90 Level 5	
Address: 13081 John I	Bauer Blvd	Seat Color:	Blue	
City, State, Zip: Grass Valley		Flooring and Color:	Gray	
Phone: 530-477-010	3	Salesperson:	JR Castro	
	lkenburhco@nevada.ca.us	Salesperson Cell:	909-731-5274	arang albas
Delivery: <u>120-180 da</u>	ys after receipt of PO	Salesperson E-Mail:	jcastro@mo	
Quantity:	Description	Price	Ext. Price	ADA
1 Starcraft Bus	- Class E - (Ford F550) 30'	\$ 156,998.00	\$156,998.00	\$35,535.00
29	Published Options		4, 5, 5, 6	44.543.00
	n Foldaway Seat (double)	\$ 2,256.00	\$4,512.00	\$4,512.00
	ystem (4 interior, 1 exterior ADA speaker)	\$ 501.00	\$501.00	\$501.00
	riveline Brake Retarder	\$ 12,753.00		
1000 Maria	tive Park Crank Only Module	\$ 164.00	\$164.00	
20070 002 0	e additional (loose, full size, match OEM)	\$ 1,270.00		
	rks bike rack (black 2 bike)	\$ 2,889.00		
1 74 - CrossOv		\$ 142.00	\$142.00	
1 75 - Roof Ver		\$ 338.00	0000 1000000 0000	
1 81 - Dialight		\$ 1,150.00		
1 82 - Dialight		\$ 872.00		ź4 000 0
	equest System (w/ sign)	\$ 1,090.00		\$1,090.00
1 120 - Diamor	nd Farebox SV (2 vaults)	\$ 2,616.00	\$2,616.00	
06	Non-Published Options	4250.00		¢250.00
	ver (Full Cover - Braun)	\$350.00	\$350.00	\$350.00
1 Decals	0 2 0 20 00 0	\$4,910.00	\$4,910.00	<b>44.4.000.0</b>
	olay-amber LED Sign System w/HTC/AVA System-Internal Amber sign	\$14,000.00	\$14,000.00	\$14,000.00
1 Camera-Lum	inator RoadRunner Analog HD-8 Camera	\$7,500.00	\$7,500.00	
			4455,000,00	
		Class E - Base Price	\$156,998.00	
		Published Options	\$28,297.00	
		Non-Published Options	\$26,760.00	ĆEE 207.00
		Total	\$212,055.00	\$55,287.00
		Doc Prep Fee	\$85.00	
	The Non-Taxable Amount is the ADA Equipment in the Base and Added as Options	Non-Taxable	\$55,287.00	
	The Taxable Amount Includes the Mobility Rebate of \$1,000.00 For Ford Chassis	Taxable Amount	\$157,853.00	P F000
	635	Tax Total	\$13,417.51	8.500%
		Sub-Total	\$225,557.51	
		CalACT Fee	\$3,180.83	
		DMV E-File Fee:	\$33.00	(Estimated)
		DMV Fee	\$0.00	[Estimatea]
		Tire Fee	\$12.25	
		Local Delivery	\$0.00	
		Total	\$228,783.58	
		Number of Units	2	
		Final Total	\$457,567.16	

SafeFleet

Purchasing of vehicles requires a CALACT membership, letter of assignment, and payment of procurement fee. If you have any questions, please contact CALACT direct at 916-920-8018



MODEL 1 COMMERCIAL VEHICLES 14740 Ramona Ave. Chino, CA, 91710

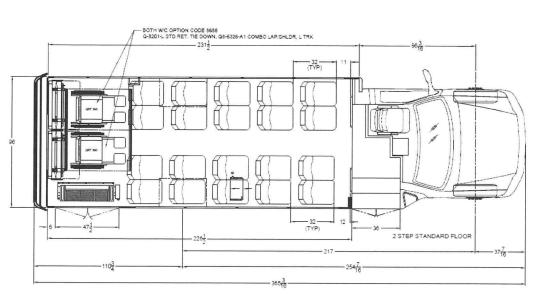

2" MIN. (45°54)


DEALER APPROVAL


APPROVED


CUSTOMER SIGNATURE


NOTE: SHOWN WITH HI BACK FREEDMAN SEATS
F-580 CHASSIS 8° WIDE
19:500 GWR
THIS FLOOR PLAN IS FOR ILLUSTRATION PURPOSES ONLY.
A WEIGHT ANALYSIS HAS NOT YET SEEN PERFORMED
FINAL APPROVAL WITH A WEIGHT ANALYSIS IS REQUIRED UPON RECEIPT OF A
COMPLETED ORDER WITH ALL OPTIONS SHOWN.
OPTIONAL EQUIPTIENT MAY BE SHOWN.
THE SALES ORDER PLACED DICTATES ACTUAL OPTION CONTENT.



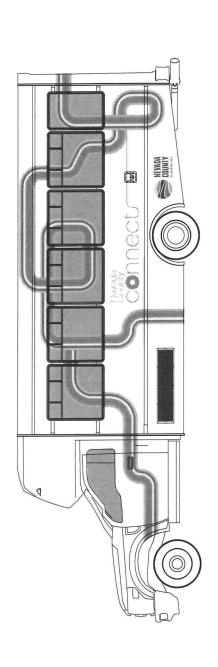

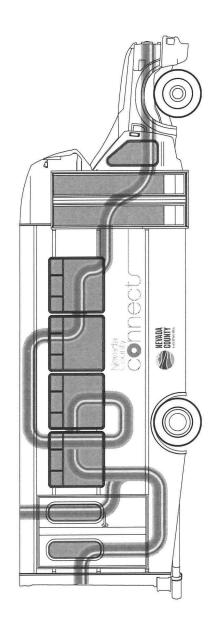







\*Bus photo is not to exact specifications

## **Class E Standard Build Options**

ALLSTAR XL F550 - 96" WIDE				
FORD F-550 19,500 GVWR 7.3L Prem Gas ENGINE	1			
Allstar XL 30 217" WB 226" Body 7.3L Prem Gas Includes 2nd Battery, Box & Tray	ST	93133	Г	1
SPECIAL INSTRUCTIONS OR NOTES				1
SEE BOTTOM OF ORDER FRO WARRANTY	1			1
Dealer to Perform 4-Wheel Alignment in California	]			1
Dealer to Weigh Each Bus on California Certified Scale	1			1
No Tow Vehicle Allowed During Delivery	4			1
Use 250 lbs Per Wheelchair Position  Parts Manual with As-built Electrical Schematics	4			1
All Excessories Except Lights, WC Lift & Mobile Radio (If Equipped) Are Ignition Hot	1			1
Wiring Harnesses Supported Every 24" Maximum	1			1
No Butt Connectors Allowed	1			1
If Driver Switch Panel is on Engine Cover, Then a Quick Disconnect is Required	1			1
Fast Idle: 1500 RPM on Gas - Fast Idle to Engage if Voltage Drops Below 12.5 VDC or if	]			1
Install Dome Light With Every Row of Seats, Including WC Position, Must Meeting 8	]			1
Hip-To-Knee Spacing 27" Minimum	1			1
Seat Track Not Extend More than 6" Past Seats Undercoat Metal Skirts	4			1
Ground to First Step Height Shall Not Exceed 12.5" Unloaded	1			1
304SS Required for Entry Grabs and Ceiling Grabs	1			1
Ceiling Grab Rails Require Formed Elbows - No End Caps	1			1
AC & Heater Hoses Supported Every 24" Minimum	1			1
Build Front Driver Storage Compartment as Large as Possible, For Storage of Tiedown	]			1
Install Toolbox Next to Lift if Space Allows	1			1
Convex Mirror Must Avoid Sun Visor and Overhead Door	1			1
Headlight Aiming Certificate - Ship with Bus	4			1
Water Test Certificate - Ship with Bus Driveline Metal Guards for Each Section of Shaft	1			1
All Harnesses Secured to Frame at Maximum of 24"	1			1
P-Clamps Added as Deemed Necessary by MBTA Inspector	1			1
Batteries Must Be Same Type (No Mismatch) (1 In Tray - 1 Underhood)	1			1
Continuous Run Battery Cables	1			1
Slide Blocks To Hold Batteries In Place	]			1
Floor Track Will Not Be Installed in Any Area not Covered by a Fixed Seat	1			1
Operations Manual - Covering Conversion Features as Listed	1			1
Parts Book, Operating Instructions, Troubleshooting Guide, Inspection & Service Guide,	1			
SPECIAL PULL D ORDER				1
SPECIAL BUILD ORDER	L OT	- 00		1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install	ST	99		1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT	ST	99	E	1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate	ST ST	99 99		1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT	ST	99		1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door	ST ST	99 99 99		1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only	ST ST ST ST ST	99 99 99		1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware	ST ST ST ST ST ST	99 99 99 99 99		1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve	ST ST ST ST ST ST ST	99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves	ST ST ST ST ST ST ST ST	99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR	ST ST ST ST ST ST ST ST ST	99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor	ST ST ST ST ST ST ST ST ST	99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells	ST ST ST ST ST ST ST ST ST	99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT  Interlock on Entry Door - Must Be in Park to Operate  ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB  Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3"  Install Battery Cable Wiring Diagram Inside Battery Access Door  Decal: Battery Disconnect, Emergency Use Only  Stainless Steel Battery Hold-Down Hardware  Add 2nd Heater Line Brass 1/4 Turn Valve  Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves  KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR  5/8", 7 Ply AC Marine Grade APA Plywood Floor  Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling  14 Gauge Galvanized Steel Wheelwells  Dual Handles on WC Lift Doors	ST ST ST ST ST ST ST ST ST ST	99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each	\$T \$T \$T \$T \$T \$T \$T \$T \$T \$T	99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE	\$T \$T \$T \$T \$T \$T \$T \$T \$T \$T	99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE	ST	99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System SIDEWALL / REARWALL / CEILING	ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING Sidewall: Grey FRP	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System SIDEWALL / REARWALL / CEILING	ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING Sidewall: Grey FRP Driver Area: Grey Padded Vinyl	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT  Interlock on Entry Door - Must Be in Park to Operate  ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB  Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3"  Install Battery Cable Wiring Diagram Inside Battery Access Door  Decal: Battery Disconnect, Emergency Use Only  Stainless Steel Battery Hold-Down Hardware  Add 2nd Heater Line Brass 1/4 Turn Valve  Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves  KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR  5/8", 7 Ply AC Marine Grade APA Plywood Floor  Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling  14 Gauge Galvanized Steel Wheelwells  Dual Handles on WC Lift Doors  Laminated Modesty Panel, Grey Melamine, Each  Intermotive Break Out Box  GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM  Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING  Sidewall: Grey FRP  Driver Area: Grey Padded Vinyl  FRP on Ceiling, Grey	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System SIDEWALL / REARWALL / CEILING Sidewall: Grey FRP Driver Area: Grey Padded Vinyl FRP on Ceiling, Grey FRP Or Rearwall, Grey Cove Colored Flooring on Sidewall to Seat Track FLOORING	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate  ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only  Stainless Steel Battery Hold-Down Hardware  Add 2nd Heater Line Brass 1/4 Turn Valve  Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves  KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR  5/8", 7 Ply AC Marine Grade APA Plywood Floor  Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling  14 Gauge Galvanized Steel Wheelwells  Dual Handles on WC Lift Doors  Laminated Modesty Panel, Grey Melamine, Each  Intermotive Break Out Box  GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM  Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING  Sidewall: Grey FRP  Driver Area: Grey Padded Vinyl  FRP on Ceiling, Grey  FRP on Rearwall, Grey  Cove Colored Flooring on Sidewall to Seat Track  FLOORING  Altro Meta Storm	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate  ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING Sidewall: Grey FRP Driver Area: Grey Padded Vinyl FRP on Ceiling, Grey FRP on Rearwall, Grey Cove Colored Flooring on Sidewall to Seat Track  FLOORING Altro Meta Storm Yellow Step Nosing per Step	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Driver Entry Grab Steel Reinforced Plastic - Nutsert Install  (3) GROUND WIRES TO BE ZERO OUGHT GAUGE, TO BE CONTINUOUS WITHOUT Interlock on Entry Door - Must Be in Park to Operate ENTRY DOOR HEADER ACCESS PANEL DOOR MUST BE HINGED WITH 2 THUMB Battery Tray: SS Tray & Slides Per Standard Options Below. Must Extend at Least 3" Install Battery Cable Wiring Diagram Inside Battery Access Door Decal: Battery Disconnect, Emergency Use Only Stainless Steel Battery Hold-Down Hardware Add 2nd Heater Line Brass 1/4 Turn Valve Decal: "Heater Shut Off Valve" - Install On Street Side Near Valves KEYED LOCK ILO THUMB LATCH FOR ELECTRICAL CENTER DOOR 5/8", 7 Ply AC Marine Grade APA Plywood Floor Upgrade Driver Plexi Barrier: Extend to Within 6" of Ceiling 14 Gauge Galvanized Steel Wheelwells Dual Handles on WC Lift Doors Laminated Modesty Panel, Grey Melamine, Each Intermotive Break Out Box GENERIC PARTS MANUAL ON FLASH DRIVE  ELECTRICAL SYSTEM  Intermotive Flex Tech Electrical System  SIDEWALL / REARWALL / CEILING Sidewall: Grey FRP  Driver Area: Grey Padded Vinyl FRP on Ceiling, Grey FRP on Rearwall, Grey Cove Colored Flooring on Sidewall to Seat Track  FLOORING Altro Meta Storm	ST   ST   ST   ST   ST   ST   ST   ST	99 99 99 99 99 99 99 99 99 99 99 99 99		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1



	1 !	00500		
HEAVY DUTY DRIVER RUNNING BOARD ** F-550 ONLY	05	22503	+	1
Romeo Rim Rear Bumper w/HawkEye RAS Installed Valve Stem Extender Inner Dual Rear Wheel, pair	05	22040		1
ENVIRONMENTAL CONTROL	00	22040		<u> </u>
	1			
TRANS/AIR INTERNATIONAL A/C OPTIONS				
NOTE: CHECK THE CHASSIS/BODY COMBINATION FOR THE MODEL BEING ORDERED				
ABOVE FOR THE PROPER ENGINE KIT	l			
ENVIRONMENTAL CONTROL * NO TIE IN SYSTEMS ALLOWED BY INTERNATIONAL				
DOES THE ENGINE HAVE AN AIR PUMP? YOU MUST				
ENTER YES OR NO FOR PROPER ENGINE KIT!!!!				
TA SUPER 13 80K SYSTEMS 13 CID COMPRESSOR CHOOSE	1			
SINGLE TALL SKIRT OR ROOF MOUNT CONDENSER	1			
TA774C SUPER 13 TA77 EVAP SC4 TALL COND 13 CID COMP	05	22058	П	1
HEATERS			<b>100</b>	
Hot Water Heater, 65K BTU - Floor Mounted	05	20083		1
MISCELLANEOUS				
Silicone Heater Hose (for rear unit) w/full ring clamps	05	22076		1
ELECTRICAL				
Stainless Steel Battery Box & Tray	05	22089		1
Rotary Disconnect Switch	05	22092		1
Laminated Wiring Schematic ***AS BUILT*** ON ELECTRICAL PANEL DOOR	05	22101		1
EXTERIOR LIGHTS	_			
Surface Mount LED Entry Door Exterior Light - STD Choose Optional Below or Special builds	05		$\vdash$	1
LED Rear Center Mount Brake Light, Rectangular	05	20136	$\vdash$	1
LED Mid-Ship Turn / Marker Lights REQUIRED 30' AND LONGER	05	20138	$\vdash$	1
Independent RED Brake & AMBER Turn Signal Lights (per NJ specs)	05	20139		-
INTERIOR LIGHTS	05	8041		3
Additional Interior Lights (LED If Option Selected) Each AUDIO / VISUAL	03	0041		
MARIE SPECIAL SERVICES AND	1		530	
FORD F550 OEM AM/FM RADIO W/AUX INPUT AND CLOCK (F550 RADIO CAN'T BE		NOTE		1
REMOVED) - ORDERED ON CHASSIS 4 Speakers with Wire to Chassis OEM Radio (If Supplied)	05	20159	+	1
DOORS / HATCH / WINDOWS	03	20100		
Required: please select one passenger door option.	1		200	
Passenger Door Electric (Standard)	05	STD	1	1
Passenger Door 36" (Standard)	05	2063	$\vdash$	1
Exterior Passenger Entrance Door Key	05	8133	$\vdash$	1
Solid Window(s) EACH Replace T-Slide(s) Enter Specific Instructions in Row Below	05	20187		1
STREET SIDE REAR				1
INTERIOR			8	
Driver Coat Hook	05	8769		1
LUGGAGE RACK / STORAGE				
Driver Storage in Cab Overhead with Lock	05	20192		1
PARATRANSIT OPTIONS				
Double W.C. Doors w/ Windows, LED Interior Lights, Leaf Spring, LED Exterior Lighting	05	20206		1
4" Grommet Mount LED is STD. Use Special Builds for Optional Choices				1
IS THE LIFT IN THE FRONT OR REAR OF THE UNIT?	0.5	0711		1
Braun Century NCL917-2 800# Lift (33"x51")	05	8744		1
LIFT INTERLOCK				
Fast Idle w/Interlock - Intermotive GTWY508-F FORD F550 / F650 GAS	05	99		1
Q Straint W.C. Securement Kits, Accessories				92
Q10007 - 4 QRT 360 Retractr Tie Down L track & Q8-6326-A1 Comb-Lap/Shldr	05	8826	$\vdash$	2
Q5-7580-4 18" Blue Webbing Loops	05	20250	$\vdash$	8
Q5-6327 84" Postural Belt with Padding - Black Webbing	05	20251 8179	$\vdash$	1
Q-Straint Belt Cutter (ship loose)	05	01/9	ш	15
	05	8616		1
SAFETY OPTIONS	05	20264	$\vdash$	1
10 Lb Fire Extinguisher			$\vdash$	1
10 Lb Fire Extinguisher Body Fluid Kit	05	8091	-	1
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit	-	8091 2880		
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575	05		$\vdash$	
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575 STANDARD ROSCO STSK4750 BACK-UP CAMERA SYSTEM W/ 7" REARVIEW MONITOR /	05 05	2880	$\parallel$	4
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575  STANDARD ROSCO STSK4750 BACK-UP CAMERA SYSTEM W/ 7" REARVIEW MONITOR / MIRROR COMBO	05 05 <b>05</b>	2880 STD		1
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575  STANDARD ROSCO STSK4750 BACK-UP CAMERA SYSTEM W/ 7" REARVIEW MONITOR / MIRROR COMBO Interior Convex Mirror 6" x 9"	05 05 <b>05</b> 05	2880 STD 20276		1
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575  STANDARD ROSCO STSK4750 BACK-UP CAMERA SYSTEM W/ 7" REARVIEW MONITOR / MIRROR COMBO Interior Convex Mirror 6" x 9" Red Light Over Emergency Exit Ea: ON: SIDE & REAR EGRESS WINDOWS	05 05 <b>05</b> 05 05	2880 STD 20276 8155		1
10 Lb Fire Extinguisher Body Fluid Kit Emergency Triangle Kit Back-Up Alarm SAE Type B 107 db(A) Ecco 575  STANDARD ROSCO STSK4750 BACK-UP CAMERA SYSTEM W/ 7" REARVIEW MONITOR / MIRROR COMBO Interior Convex Mirror 6" x 9"	05 05 <b>05</b> 05	2880 STD 20276		1



Ceiling Grab Rail - Install on Both Sides		05	99	7 1
Left Hand Entry Vertical Grab Rail - 1 1/4		STD	1	
1 1/4" Grab Rail Parallel to Entrance Step	os (both sides)	05	8130	1
Stanchion and Modesty Panel at Entry Do	oor		STD	1
Stanchion and Modesty Panel Behind Dri	ver	05	20301	1
Add Tinted Plexiglass Upper Panel	LOCATION:	05	8146	1
SE SE	ATING - DRIVER	1		1
FORD F	-550 DRIVER SEATING			1
Ford F-550 OEM Driver's Seat - Order Or	n Chassis		NOTE	1
SEAT	TING - PASSENGER	9	····	
S	TD RIGID SEATS	题		
Mid High Double Seat		05	8067	10
PASSE	NGER SEAT FABRICS	題		
EUROPEAN OR AMERICAL	N WOOL QUOTED AT TIME OF ORDER!!!!			
Seat Cover - Level 4 Ice Pinstripe; Mor-C	are; Leathermate	05	2074	20
<b>建设建设的规则</b>	SEAT OPTIONS	1		
Anti-Vandal Grab Handle, Black Ea on:	ALL SEATS EXCEPT AGAINST REAR WALL	05	2311	20
Black US Armrest - Each - on:	AISLE	05	2077	10
Flame Block Material on Underside of Se	05	2884	20	
<b>始终,在这个时间,不是这种特别</b>	1		30	
Seat Belt, Freedman USR Retractable (P	er Person)	05	2282	20
Seat Belt Extension, 12" (P/N 56410) FO	R USR SEAT BELTS	05	8771	2

## SUMMARY OF STANDARD WARRANTIES

(Provide complete warranty information and parchment with proposal)

Warranty	Miles	Years	Warranty Details
Body Structure	100,000	5	See attached Warranty Info
Chassis	36,000	3	See attached Warranty Info
Engine	60,000	5	See attached Warranty Info
Transmission	60,000	5	See attached Warranty Info
Air conditioner	Unlimited	2	See attached Warranty Info
Lift/Ramp	Unlimited	5	See attached Warranty Info
EV Battery	N/A	N/A	N/A
EV Conversion/Installation	N/A	N/A	N/A
CNG Warranty (Install and tanks)	N/A	N/A	N/A



MODEL 1 COMMERCIAL VEHICLES 14740 Ramona Ave. Chino, CA, 91710



Item	Configuration	Description	Qty		
GROUP 0					
		112*15 AMBER SMT 12V SIGN	1.00		
G4.054A.I12.000	N72.0.TL	FRONT SIGN - CASE DIMS - 44 1/2 x 8	1/4 x 2		
BK2058		FRONT SIGN BRACKET	1.00		
DIV2030		FRONT SIGN MOUNTING BRACKET			
		96X15 AMBER SMT 12V SIGN	1.00		
G4.139A.I12.000	N72.0.TL	SIDE SIGN - CASE DIMS - 32 1/2 x 7 7/ 7/16"	8 x 2" -		
BK2180		BKT SET DD096 DD139 SIDE SIGN ARBOC	1.00		
		SIDE SIGN MOUNTING BRACKET			
DG3 03 6 0		DERIC G3 CONT ETHERNET + J1708	1.00		
9		J1708 CONTROLLER WITH ETHERNET CAPAE			
BK382		DERIC+ MOUNT BKT VOLVO B10	1.00		
BR302		DG3 MOUNTING BRACKET			
CU018(TYPE01)		DG3 POWER AND COMMS WITH EMERGENCY INPUT (6.0,0.3,0.3)	1.00		
	<u>*</u>	DG3 INTERFACE CABLE			
CU020(1.0)		2W WP POWER CABLE	1.00		
C0020(1.0)		POWER CABLE			
CU011(4.3)		4W POINT TO POINT CABLE	1.00		
00011(4.3)		POWER & COMMS POINT TO POINT			
CU012		4W SPLITTER	1.00		
		POWER & COMMS SPLITTER			
CU013(TYPE01)		HTC COMMS ADAPTER CABLE (0.3,0.15,0.15,0.15)	1.00		
		HTC POWER AND COMMS SPLITTER			

L	HTC VARIANT	1.00	L	
HT2100110100000	HTC AVA (LINE INPUTS ONLY)		EL1.COM	
CX003(3.0)	COMMS SIGN TR-M TO SIGN TRI-F 3.0M	1.00		
0,000(0.0)	COMMS SIGN TR-M TO SIGN TRI-F 3.	ом	_	
	144*19 3.96 LED SIGN 485 I\F N73 WI	1.00		
L060485-N73	144*19 INTERNAL ON BOARD NEXT S	STOP SI	G	
CX003(3.0)	COMMS SIGN TR-M TO SIGN TRI-F 3.0M	1.00		
0,000(0.0)	COMMS SIGN TR-M TO SIGN TRI-F 3.	ОМ		
	8GB INDUSTRIAL SD CARD	1.00		
SD08	SD CARD WITH SOFTWARE	SD CARD WITH SOFTWARE		
CU034(TYPE01)	12V TO 24V HTC DUAL POWER WITH OBNSS LEG (1.0,1.0,1.0,1.0,1.0)	1.00		
	12V TO 24V HTC AND OBNSS POWER	R CABLE	-	
	SVGA CABLE M/M 7.6M	1.00		
CA305(7.6)	LOW PROFILE VGA CABLE		_	
	GPS & WIFI ANTENNA	1.00		
ANT02	GPS AND WIFI ANTENNA			
	DIGI IPT (1.0,1.0,1.0,1.0,1.0,1.0)	1.00		
CX740(TYPE01)	DIGITAL INPUT CABLE		_	
	HTC ERIC++ COMMS CABLE(2.5,1.3)	1.00	L	
CX706(TYPE01)	HTC TO CONTROLLER AND OBNSS (	COMMS	C	
	HTC LINE-OUT (8.0,8.0,8.0)	1.00	L	
CX742(TYPE01)	HTC LINE OUT CABLE WITH AUX 2 E	NABLE		

	Standard 21.5in
TFT.STD.215.003	21.5" TFT MONITOR
BK1251	TFT BRACKET HORIZONTAL POLE MOUNT FOR 31.5mm POLES
BR1201	#Error
	4W TO 2W MINIFIT CABLE
CU028(5.0)	STANDARD TFT POWER CABLE
	4W SPLITTER
CU012	POWER & COMMS SPLITTER
	USB Drive Hanover Manuals
Sales-Brochures	USB with Helen Software and Manuals



**MODEL 1 COMMERCIAL VEHICLES** 14740 Ramona Ave. Chino, CA, 91710



### Base 4 Camera AHD

CO	

1	2	RR-AHDRN08	RoadRunner Analog HD 8 Camera Mobile Recorder, RsM™ Software, Accelerometer, NDAA, (Removable Storage Drive Required, Sold Separately)
2	2	RR-AHDD4	RoadRunner AHDR Removable Hard Disk Drive, 4.0TB
3	2	009-0064-002	Cable, Camera Power Pigtail Dual, DVR
4	2	007-0016-001	Switch, Momentary, Red/Green LED, Stainless, IP67
5	2	009-0065-015	Cable, Event Switch Extension, Red/Green LED, 6-pos Microfit, 15ft
6	2	099-0032-007	Cable Assy, Power and Fuse, MRH Series w/Heater, 7'
7	2	009-0506-007	Cable, AHD, Alarm Input, 7'
8	2	009-0258-025	Cable, Patch, Cat6, Molded, Yellow, 25'
9	2	014-0009-002	GPS, Active GPS, 28dB , Low Noise, 20' Cable, MSMA Connector
Camor	20-		

#### Cameras

10	6	RR-CTMIRA25-C-AHD	RoadRunner AHD Camera, Color Vandal Resistant Interior High Resolution, Day/Night Mini Tapered Dome w/ IR Illumination & Audio Recording, 2.5mm Lens, Ceiling Mount
11	2	RR-CTF100-AHD	RoadRunner AHD Camera, Fixed Forward-Facing Dome
1			

#### Camera Cables:

12	2	099-0034-020	Cable Assy, Audio/Video/Power, Molex on both ends, 20'
13	2	099-0034-025	Cable Assy, Audio/Video/Power, Molex on both ends, 25'
14	4	099-0034-035	Cable Assy, Audio/Video/Power, Molex on both ends, 35'

#### Aud on 4 Cameras.

	15	2	RR-CTMIRA25-C-AHD	RoadRunner AHD Camera, Color Vandal Resistant Interior High Resolution, Day/Night Mini Tapered Dome w/ IR Illumination & Audio Recording, 2.5mm Lens, Ceiling Mount
-	16	2	RR-CW1-CS-AHD	RoadRunner AHD Camera, Color Vandal Resistant High Resolution Exterior Wedge, Curbside Orientation
Annual Control of the last	17	2	RR-CW1-SS-AHD	RoadRunner AHD Camera, Color Vandal Resistant High Resolution Exterior Wedge, Streetside Orientation
-	18	2	RR-CTM29-C-AHD	RoadRunner AHD Camera, Color Vandal Resistant, Exterior, High Resolution, Miniature Tapered UV Coated Dome, 2.9mm Lens, Ceiling Mount
-	19	2	099-0034-025	Cable Assy, Audio/Video/Power, Molex on both ends, 25'
Name and Address of the Owner, where	20	2	099-0035-015	Cable Assy, Video/Power, Molex on both ends, 15' REV A
NO CONTRACTOR DE LA CON	21	2	099-0035-020	Cable Assy, Video/Power, Molex on both ends, 20' REV A
C DOCUMENTS	22	2	099-0035-040	Cable Assy, Video/Power, Molex on both ends, 40'