

# FRITZ & COMPANY

SHOP: 5859 ROSEBUD LANE, SUITE C-17

SACRAMENTO CA 95841

Lic. # C10-992592

916-344-0288 E-MAIL billanefritz@yahoo.com

*Band -*  
*Gen*  
*Quotes*

## QUOTATION

Quote To: <b>NEVADA COUNTY</b>	Date: July 14, 2015
Attention: <b>Jerry Hensley</b>	Quote #: Q2150714-1 Project Name: Generator replace – Cascade Shores

ITEM	QUANTITY	DESCRIPTION	AMOUNT
1	1	20 kw lp gas engine driven generator by Kohler Model: 20 RESA, rated @ 120/240 volt, 1 phase Engine: Kohler, Model CH-1000, 30.9 bhp Generator: Kohler: Model 2F7, 60 hz @ 3600 rpm Controller: RDC2, digital microprocessor Enclosure: Composite, Sound attenuated, 69 db(A) Wireless, OnCue Plus for remote monitoring Programmable interface module for scada connect See attached spec sheet for complete description	<b><u>\$ 4,775.00</u></b>  Plus tax, per jurisdiction having authority.  Tax will be added to The invoice.
2	1 LOT	Installation services, including all necessary pipe and piping, wire and wiring, battery, startup commissioning, warranty registration and owner orientation.  <b><u>NOTE:</u></b> Excluded from this quote are all permits and permitting, fuel for startup test commissioning.	<b><u>\$ 2,992.00</u></b>  Plus tax on materials, per jurisdiction having authority. Tax will be added to the invoice.

Quote Valid for <b>30 DAYS, Prices are subject to factory changes, usually with notice.</b>	Approved Credit Terms: With prior credit approval by Fritz & Company credit department, invoices shall be due and payable within 20 calendar days from date of invoice.	Approx. Shipping Weight: N/A
F.O. B. – Terms freight allowed from factory to jodsite with offloading .	<b>Invoicing shall be in two stages: (1) for the generator upon notification of shipment from factory and (2) after final system test of installed unit.</b>	Delivery: 4 to 6 weeks after receipt of order.

Signature: SENT BY EMAIL  
William C. Lane

Date: July 14, 2015

ACCEPTED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

Jerry,

**Model: 6730**

20 kW Air-Cooled Home Standby

**Price: \$4,060.00**

**Rated Power (LPG/NG):** 20/18 kW

**Enclosure:** Steel

**Sound Level:** 60/66

**Description/Proposal Text:**

20 kW air-cooled home standby generator with steel enclosure

No battery, Switch, Taxes, Installation, or permits included

FOB Energy Systems, Stockton CA.

Lead time Stock to 4 weeks

Cut sheet attached

Optional (Not Included)

At site start-up and instructions , upon completion of installation, using existing building loads. If load bank testing at site is required additional charges will apply. Owner training to be conducted same day of start-up.

**Add \$1,100.00**

**Roger Martin**

**Senior Sales**

209-870-1900

[RMartin@ESPowerGen.com](mailto:RMartin@ESPowerGen.com)

[[www.ESPowerGen.com](http://www.ESPowerGen.com)][www.ESPowerGen.com](http://www.ESPowerGen.com)

***"2014 Generac Industrial Eagle Award Recipient"***

*Powered by Integrity*



California Diesel & Power

GOTPOWER.COM

8/19/2015

Nevada County  
Jerry Hensley  
Jerry.Hensley@co.nevada.ca.us

RE: Generator Replacement

Thank you for the opportunity to provide pricing for the generator set and system accessories on the above referenced project. We are pleased to quote as follows:

One Generator Kohler Generator 20 RESA 20 KVA, 120/240 single phase, propane, carb heater, interface module to use existing remote annunciator.

Net Price: \$5,950.00 + tax

**Installation**

- Remove current generator.
- Set and place new generator on current concrete pad with crane truck.
- Make all necessary electrical connections.
- Connect current fuel piping to new generator.
- Labor to connect interface module to have the current annunciator compatible with current annunciator.
- Mileage

Net Price: \$5,750.00 + tax

Freight:	Included
FOB:	Freight allowed to jobsite, offloading by others.
Lead time:	3-4 Weeks
Fuel:	NOT included
Permits:	Not Included
AQMD:	Not Included
Engineering:	Not Included
Sales Tax:	Included
Pricing:	Valid 30-Days from date on quote. Pricing may be adjusted after submittals and air quality acceptance.
Restocking:	A restocking fee of 15% will apply for cancellation after receipt of purchase order and up to 60 days prior to scheduled order shipment date. Cancellation 60 days or less before scheduled shipment date will result in full PO charges.

Please do not hesitate giving us a call with questions or concerns.

Sincerely,

Gibb Maclean  
916-564-2622

**Corporate Headquarters:**  
150 Nardi Lane  
Martinez, California 94553  
Phone 925.229.2700 Fax 925.229.2702  
Contractor License #757162

**Sacramento Branch:**  
4372 Pinell Street  
Sacramento, California 95838  
Phone 916.564.2622 Fax 916.564.1083

*Powered by Integrity*



California Diesel & Power

GOTPOWER.COM

Exceptions unless otherwise noted:

1. There is no off-loading or installation of this equipment included in our proposal.
2. There is no fuel included in our proposal.
3. We are offering only the manufacturer's standard lugs in our proposal. Any special lugging will be quoted on an individual basis.
4. Some AQMD's require that a particulate trap be added to generators for jobs located within 100 meters of a school, grades K-12, or day care centers. If your jobsite is within these requirements, we will be glad to give you price adders for the installation of a particulate filter.
5. Disposal of old generator not included.

#### CONDITIONS OF SALE

The Terms and Conditions of Sale below constitute an Agreement between California Diesel & Power and Customer. The provisions of this agreement supersede all prior agreements, negotiations, representations and warranties whether written, oral or otherwise, and no waiver, alteration, or modification of this agreement shall be binding unless agreed to in writing and signed by both California Diesel & Power and customer.

QUOTATIONS are valid for thirty (30) days from the date of quotation unless agreed to in writing by California Diesel & Power. A Quotation is not a valid acceptance of an offer to sell unless (1), a Purchase Order signed by an authorized representative of the Customer is received by California Diesel & Power or (2), approved by California Diesel & Power Credit Department. Equipment in stock is subject to prior sale.

A recent California Air Resources Board rule requires that a particulate trap be added to generators for jobs located at or within 100 meters of a school grades K through 12 or day care centers. If your jobsite is within these requirements we will be glad to provide you price adders for the installation of a particulate filter.

SPECIAL ORDERS - A nonrefundable deposit is required for all special order equipment and accessories. The deposit will be applied against the balance of the equipment invoice and cancellation charges, if any.

CHANGES AND MODIFICATIONS - Customer agrees to pay for any changes in scope, design or work plan from that ordered. California Diesel & Power shall have the right to subcontract any or all work covered by the sale. Sale is non-assignable by the Customer without prior written approval of California Diesel & Power.

TERMS - All billings are net fifteen (15) days from the date of invoice. Retention is not acceptable. Customers not adhering to payment terms agree to pay delinquency charges of 1.5% per month or the maximum allowable by law, whichever is greater, on the unpaid balance. If California Diesel & Power commences an action to collect amount due the Customer agrees to reimburse California Diesel & Power all collection costs, attorney fees and court costs.

**Corporate Headquarters:**

150 Nardi Lane  
Martinez, California 94553  
Phone 925.229.2700 Fax 925.229.2702  
Contractor License #757162

**Sacramento Branch:**

4372 Pinell Street  
Sacramento, California 95838  
Phone 916.564.2622 Fax 916.564.1083

***Powered by Integrity***



**GOTPOWER.COM**

**California Diesel & Power**

**FINAL ACCEPTANCE** - Final acceptance shall occur at time of delivery. Offloading is the Customer's responsibility unless otherwise provided for. Storage and interest charges will result when equipment and accessories ready for shipment to the Customer are held in California Diesel & Power inventory due to Customer's inability to accept delivery.

**WARRANTY** - All implied warranties including without limitation merchantability and fitness for a particular purpose are excluded from this Agreement. California Diesel & Power disclaims all liability for special, incidental, and consequential damages. The only warranty for equipment sold to the Customer shall be the Manufacturer's warranty. California Diesel & Power obligation is limited to rework or replacement of materials necessary to correct any condition of the equipment resulting from defects in material. Manufacturer's warranty is not effective until Start Test is performed by California Diesel & Power. Start and Test must be paid in advance.

**RETURNED MERCHANDISE** - Equipment, accessories and parts cannot be returned without California Diesel & Power written approval.

Equipment, accessories and parts must be in salable condition. Customer must pay transportation costs and restocking charge of twenty-five percent (25%) of invoice amount.

**SECURITY INTEREST** - California Diesel & Power retains and Customer hereby grants California Diesel & Power a Security Interest in equipment sold, including all accessions to and replacements of the equipment, until the Customer has made payment in full in accordance with the provisions herein. Customer shall cooperate fully with California Diesel & Power in executing such documents as California Diesel & Power may deem necessary for the protection of such Security Interest.

**TAXES, LICENSES, PERMITS AND INSURANCE** - Customer shall pay to California Diesel & Power the amount of any sales, use, excise, duty or similar tax attributable to the sale covered hereby, whether or not included in the purchase or quotation price. California Diesel & Power will assume no responsibility for obtaining permits or licenses other than those specifically provided for. Customer shall reimburse California Diesel & Power for the cost of providing any insurance related rights or waivers associated with California Diesel & Power existing insurance policies. Where taxes do not apply upon sale or resale, Customer shall provide California Diesel & Power with appropriate exemption certificates.

Customer acknowledges that he has not relied on California Diesel & Power skill or judgment in the selection of equipment and that any technical advice or specifications solicited regarding the equipment shall be used at Customer's own risk. Any noncertified drawings provided are descriptive in nature and not warranties of performance.

Except as expressly provided herein, the Agreement shall be governed, construed, and interpreted by the laws of the State of California. The United Nations Convention on Contracts for the International Sales of Goods (CISG) shall not apply. California Diesel & Power elects to opt out of the CISG. Waiver by California Diesel & Power of any breach of the Terms and Conditions of Sale included herein or on any attachment shall not be construed as a waiver of any other breach. Waiver by California Diesel & Power of any breach must be in writing.

**CUSTOMER'S REMEDIES** - California Diesel & Power shall not be in default and shall not be liable for delays by equipment manufacturers or suppliers or any other circumstances beyond California Diesel & Power reasonable control. Customer's exclusive and sole remedy on account or in respect of any breach, or to any express or implied warranty, shall be to secure replacement. Correction of any nonconformity shall constitute complete fulfillment of all liabilities of California Diesel & Power. California Diesel & Power aggregate liability in any customer claim shall not, under any circumstances, exceed the payment received by California Diesel & Power for the equipment and services furnished. California Diesel & Power liability shall be limited to those claims arising solely from the acts of the California Diesel & Power. California Diesel & Power shall not be liable whether in contract or in tort or

**Corporate Headquarters:**

150 Nardi Lane  
Martinez, California 94553  
Phone 925.229.2700 Fax 925.229.2702  
Contractor License #757162

**Sacramento Branch:**

4372 Pinell Street  
Sacramento, California 95838  
Phone 916.564.2622 Fax 916.564.1083

*Powered by Integrity*



GOTPOWER.COM

California Diesel & Power

under any other legal theory for loss of revenue, use, or profit or for the cost of any labor expended. Customer agrees to indemnify, save and hold California Diesel & Power harmless for any special, direct, indirect, incidental, accidental or consequential damages to anyone by reason of any breach of contract or of any express or implied warranty.

The authorized purchaser identified below accepts this proposal and agrees, upon acceptance by California Diesel & Power, to purchase and pay for this equipment, accessories and service in accordance with the California Diesel & Power Conditions of Sale and Standard Terms & Conditions.

Company Name: \_\_\_\_\_

Contact Name: \_\_\_\_\_

Purchaser Authorized Signature: \_\_\_\_\_

Contact Title: \_\_\_\_\_

Date: \_\_\_\_\_

Purchase Order: \_\_\_\_\_

**Corporate Headquarters:**  
150 Nardi Lane  
Martinez, California 94553  
Phone 925.229.2700 Fax 925.229.2702  
Contractor License #757162

**Sacramento Branch:**  
4372 Pinell Street  
Sacramento, California 95838  
Phone 916.564.2622 Fax 916.564.1083

Models: **14/20RESA**

# KOHLER POWER SYSTEMS

**Multi-Fuel  
LP Vapor/Natural Gas**



## The Kohler® Advantage

- **High Quality Power**  
Kohler home generators provide advanced voltage and frequency regulation along with ultra-low levels of harmonic distortion for excellent generator power quality to protect your valuable electronics.
- **Extraordinary Reliability**  
Kohler is known for extraordinary reliability and performance and backs that up with an industry-leading 5-year or 2000 hour warranty.
- **Powerful Performance**  
Exclusive Powerboost™ technology provides excellent starting power. The Kohler 14 kW generator can easily start and run a 5 ton air conditioner without dropping power to other appliances.\*
- **Exclusive 100% Corrosion-Proof Enclosure**  
The bold new Kohler design is completely corrosion proof, even in harsh seaside environments, and is impact-resistant even at -34° C (-30° F).
- **Fast Response**  
Kohler's unique Fast-Response™ excitation system delivers excellent voltage response and short-circuit capability.
- **Quiet Operation**  
Kohler home generators provide quiet, neighborhood-friendly performance.

## Standard Features

- **RDC2 Controller**
  - One digital controller manages both the generator set and transfer switch functions (with optional Model RXT transfer switch).
  - Designed for today's most sophisticated electronics.
  - Electronic speed control responds quickly to varying household demand.
  - Digital voltage regulation protects your sensitive electronics from harmonic distortion and unstable power quality.
  - Two-line, backlit LCD display with adjustable contrast is easy to read, even in direct sunlight or low light.
- **Kohler Command PRO Engine Features**
  - Kohler Command PRO® OHV engine with hydraulic valve lifters for reliable performance without routine valve adjustment or lengthy break-in requirements
  - Powerful, reliable air-cooled performance
  - Simple field conversion between natural gas and LP vapor fuels while maintaining emission certification
- **Designed for Easy Installation**
  - Polymer base eliminates the need for a concrete mounting pad, reducing installation time and cost
  - Hinged, locking roof
  - Fuel and electrical connections through the enclosure wall eliminate the need for stub-ups through the bottom
  - Load connection terminal block allows easy field wiring
  - Designed for outdoor installation only
- **Certifications**
  - Meets emission regulations for U.S. Environmental Protection Agency (EPA) phase 2 small off-road engines and CA 2006 and later LSI engines with both LP vapor and natural gas
  - UL 2200 listed (60 Hz model)
  - CSA certification available (60 Hz model)
  - Approved for stationary standby applications in locations served by a reliable utility source
  - Model 14RESA is also approved for non-standby (off-grid) applications (18 month or 1000 hour warranty applies for non-standby applications)

## Generator Ratings

Model	Voltage	Phase	Hz	Alternator	Standby Ratings			
					Natural Gas		LP Gas	
					kW/kVA	Amps	kW/kVA	Amps
14RESA	120/240	1	60	2F5	12/12	50.0	14/14	58.3
	115/230	1	50	2F5	10/10	43.5	11/11	47.8
20RESA	120/240	1	60	2F7	18/18	75.0	20/20	83.3
	115/230	1	50	2F7	14/14	60.8	15/15	65.2

**RATINGS:** Standby ratings apply to installations served by a reliable utility source. All single-phase units are rated at 1.0 power factor. The standby rating is applicable to variable loads with an average load factor of 80% for the duration of the power outage. No overload capacity is specified at this rating. Ratings are in accordance with ISO-3046/1, BS5514, AS2789, and DIN 8271. **GENERAL GUIDELINES FOR DERATING:** ALTITUDE: Derate 4% per 305 m (1000 ft.) elevation above 163 m (500 ft.). TEMPERATURE: Derate 2% per 5.5°C (10°F) temperature increase above 16°C (60°F). Availability is subject to change without notice. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler Co. generator distributor for availability.

\* Check the appliance manufacturer's specifications for actual power requirements. Consult a Kohler® Power Systems professional to calculate your exact residential power system requirements.

# Alternator Specifications

## Alternator Specifications

Specifications	PowerBoost™ Generator 1-Phase
Manufacturer	Kohler
Output reconnectable	120/240
Type	2-Pole, Rotating Field
Leads, quantity	4
Voltage regulator	Digital
Insulation:	NEMA MG1-1.66
Material	Class H
Temperature rise	Class H
Bearing: quantity, type	1, Sealed Ball
Coupling	Direct
Amortisseur windings	Full
Voltage regulation, no-load to full-load RMS	±0.5%
One-step load acceptance	100% of Rating
Peak motor starting kVA @ 240 V:	
14RESA	35
20RESA	40.5

## Alternator Features

- Compliance with NEMA, IEEE, and ANSI standards for temperature rise
- Self-ventilated and drip-proof construction
- Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life
- Superior voltage waveform and minimum harmonic distortion from skewed alternator construction
- Digital voltage regulator with ±1.5% no-load to full-load RMS regulation
- Rotating-field alternator with static exciter for excellent load response
- Skewed generator construction produces a smooth AC waveform

## Application Data

### Engine

Engine Specifications	14RESA	20RESA
Manufacturer	Kohler	
Engine: model, type	CH740 4-Cycle	CH1000 4-Cycle
Cylinder arrangement	V-2	
Displacement, cm <sup>3</sup> (cu. in.)	725 (44)	999 (61)
Bore and stroke, mm (in.)	83 x 67 (3.27 x 2.64)	90 x 78.5 (3.54 x 3.1)
Compression ratio	9:1	8.8:1
Main bearings: quantity, type	2, Parent Material	
Rated RPM		
60 Hz	3600	
50 Hz	3000	
Max. engine power at rated rpm, kW (HP)		
LP vapor, 60 Hz	17.6 (23.6)	23.0 (30.9)
LP vapor, 50 Hz	15.8 (21.2)	20.0 (26.8)
Natural gas, 60 Hz	15.3 (20.5)	20.2 (27.1)
Natural gas, 50 Hz	13.8 (18.5)	16.8 (22.5)
Cylinder head material	Aluminum	
Valve material	Steel/Stellite®	
Piston type and material	Aluminum Alloy	
Crankshaft material	Heat Treated, Ductile Iron	
Governor: type	Electronic	
Frequency regulation, no load to full load	Isochronous	
Frequency regulation, steady state	±0.5%	
Air cleaner type	Dry	

### Exhaust

Exhaust System	14RESA	20RESA
Exhaust temperature exiting the enclosure at rated kW, dry, °C (°F)	260 (500)	

### Engine Electrical

Engine Electrical System	14RESA	20RESA
Ignition system	Electronic, Capacitive Discharge	
Starter motor rated voltage (DC)	12	
Battery (purchased separately):		
Ground	Negative	
Volts (DC)	12	
Battery quantity	1	
Recommended cold cranking amps: (CCA) rating for -18°C (0°F)	500	
Group size	51	

### Lubrication

Lubricating System	14RESA	20RESA
Type	Full Pressure	
Oil capacity (with filter), L (qt.)	1.9 (2.0)	2.8 (3.0)
Oil filter: quantity, type	1, Cartridge	
Oil cooler	Integral	

### Fuel Pipe Size

Minimum Gas Pipe Size Recommendation, in. NPT				
14RESA			20RESA	
Pipe Length, m (ft.)	Natural Gas 193,000 Btu/hr.	LP Vapor 203,000 Btu/hr.	Natural Gas 281,000 Btu/hr.	LP Vapor 340,000 Btu/hr.
8 (25)	3/4	3/4	1	3/4
15 (50)	1	3/4	1	1
30 (100)	1	1	1 1/4	1
46 (150)	1 1/4	1	1 1/4	1 1/4
61 (200)	1 1/4	1	1 1/4	1 1/4

## Fuel Requirements

Fuel System	14RESA	20RESA
Fuel types	Natural Gas or LP Vapor	
Fuel supply inlet	1/2 NPT	
Fuel supply pressure, kPa (in. H <sub>2</sub> O):		
Natural gas	1.2–2.7 (5–11)	
LP	1.7–2.7 (7–11)	

Fuel Composition Limits *	Nat. Gas	LP Gas
Methane, % by volume (minimum)	90 min.	—
Ethane, % by volume (maximum)	4.0 max.	—
Propane, % by volume	1.0 max.	85 min.
Propene, % by volume (maximum)	0.1 max.	5.0 max.
C <sub>4</sub> and higher, % by volume	0.3 max.	2.5 max.
Sulfur, ppm mass (maximum)	25 max.	
Lower heating value, MJ/m <sup>3</sup> (Btu/ft <sup>3</sup> ), min.	33.2 (890)	84.2 (2260)

\* Contact your local distributor for suitability and rating derates based on fuel compositions outside these limits.

## Operation Requirements

Fuel Consumption				
Model	Fuel Type	% Load	Fuel Consumption, m <sup>3</sup> /hr. (cfh)	
			60 Hz	50 Hz
14RESA	Natural Gas	100	5.4 (193)	4.9 (175)
		75	4.7 (163)	4.2 (148)
		50	3.5 (124)	3.1 (108)
		25	2.6 (93)	2.4 (84)
	LP Vapor	100	2.3 (81)	2.1 (74)
		75	2.1 (75)	1.9 (68)
		50	1.8 (60)	1.5 (53)
		25	1.2 (45)	1.1 (40)
20RESA	Natural Gas	100	8.0 (281)	6.4 225
		75	6.9 (243)	5.4 189
		50	4.6 (161)	3.9 139
		25	3.6 (127)	2.9 103
	LP Vapor	100	3.9 (136)	2.9 102
		75	3.1 (109)	2.4 85
		50	2.3 (82)	1.8 63
		25	1.7 (59)	1.3 47

Nominal fuel rating: Natural gas: 37 MJ/m<sup>3</sup> (1000 Btu/ft.<sup>3</sup>)  
LP gas: 93 MJ/m<sup>3</sup> (2500 Btu/ft.<sup>3</sup>)

LP gas conversion factors: 8.58 ft.<sup>3</sup> = 1 lb.  
0.535 m<sup>3</sup> = 1 kg  
36.39 ft.<sup>3</sup> = 1 gal.


## Sound Data

Model 14RESA sound level is 63 dBA during weekly engine exercise and 67 dBA during full-speed generator diagnostics and normal operation.

Model 20RESA sound level is 64 dBA during weekly engine exercise and 69 dBA during full-speed generator diagnostics and normal operation.

All sound levels are measured at 7 meters with no load.

## RDC2 Controller

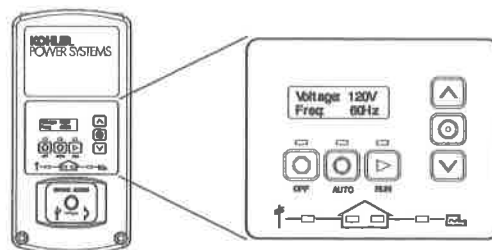

The RDC2 controller provides integrated control for the generator set, Kohler® Model RXT transfer switch, programmable interface module (PIM), and load control module (LCM).

The RDC2 controller's 2-line LCD screen displays status messages and system settings that are clear and easy to read, even in direct sunlight or low light.

## RDC2 Controller Features

- Membrane keypad
  - OFF, AUTO, and RUN pushbuttons
  - Select and arrow buttons for access to system configuration and adjustment menus
- LED indicators for OFF, AUTO, and RUN modes
- LED indicators for utility power and generator set source availability and ATS position (Model RXT transfer switch required)
- LCD display
  - Two lines x 16 characters per line
  - Backlit display with adjustable contrast for excellent visibility in all lighting conditions
- Scrolling system status display
  - Generator set status
  - Voltage and frequency
  - Engine temperature
  - Oil pressure
  - Battery voltage
  - Engine runtime hours
- Date and time displays
- Smart engine cooldown senses engine temperature
- Digital isochronous governor to maintain steady-state speed at all loads
- Digital voltage regulation: ± 0.5% RMS no-load to full-load
- Automatic start with programmed cranking cycle
- Programmable exerciser can be set to start automatically on any future day and time, and run every week or every two weeks
- Exercise modes
  - Unloaded weekly exercise with complete system diagnostics
  - Unloaded full-speed exercise
  - Loaded full-speed exercise (Model RXT ATS required)
- Front-access mini USB connector for SiteTech™ connection
- Front access mini-breaker protects the alternator
- Integral Ethernet connector for Kohler® OnCue™
- Built-in 2.5 amp battery charger
- Remote two-wire start/stop capability for optional connection of Model RDT or RSB transfer switches

See additional controller features on the next page.

## Additional RDC2 Controller Features

- Diagnostic messages
  - Displays diagnostic messages for the engine, generator, Model RXT transfer switch, programmable interface module (PIM), and load control module (LCM)
  - Over 70 diagnostic messages can be displayed
- Maintenance reminders
- System settings
  - System voltage, frequency, and phase
  - Voltage adjustment
  - Measurement system, English or metric
- ATS status (Model RXT ATS required)
  - Source availability
  - ATS position (normal/utility or emergency/generator)
  - Source voltage and frequency
- ATS control (Model RXT ATS required)
  - Source voltage and frequency settings
  - Engine start time delay
  - Transfer time delays
  - Voltage calibration
  - Fixed pickup and dropout settings
- Programmable Interface Module (PIM) status displays
  - Input status (active/inactive)
  - Output status (active/inactive)
- Load control module (LCM) menus
  - Load status
  - Test function

## Generator Set Standard Features

- Battery cables
- CARB- and EPA-certified fuel system
- Corrosion-proof polymer sound enclosure
- Critical silencer
- Field-connection terminal block
- Fuel solenoid valve and secondary regulator
- Line circuit breaker:
  - 14RESA: 70 amps
  - 20RESA: 100 amps
- Multi-fuel system, LP vapor/natural gas, field-convertible
- Oil drain extension with shutoff valve
- Premium 5-year limited warranty
- 18-month limited warranty for non-standby (off-grid) applications (14RESA only)
- RDC2 generator set/ATS controller
- Rodent-resistant construction
- Sound-deadening, flame-retardant foam per UL 94, class HF-1

## Available Options

### Communication Accessories

- ☐ OnCue™ Home Generator Management System

### Controller Accessories

- ☐ Programmable Interface Module (PIM)  
(provides 2 digital inputs and 6 relay outputs)
- ☐ Load Control Module (LCM)  
(provides 4 power relays and 2 HVAC relays)

## Available Options, Continued

### Electrical System

- ☐ Battery
- ☐ Battery heater

### Fuel System

- ☐ Braided stainless steel flexible fuel line

### Literature

- ☐ General maintenance literature kit
- ☐ Overhaul literature kit
- ☐ Production literature kit

### Starting Aids

- ☐ Carburetor heater, 120 VAC (recommended for reliable starting at temperatures below 0°C [32°F])
- ☐ Fuel regulator heater pad (20RESA; recommended for reliable starting at temperatures below -18°C [0°F])

### Kohler® Automatic Transfer Switch

- ☐ Model RXT, see specification sheet G11-121
- ☐ Model RDT, see specification sheet G11-98
- ☐ Model RSB, see specification sheet G11-101
- ☐ Other Kohler® ATS


### Miscellaneous Accessories

- ☐ \_\_\_\_\_
- ☐ \_\_\_\_\_

## Generator Set Dimensions and Weights

Overall Size, L x W x H: 1216 x 665 x 733 mm  
(48 x 26.2 x 29 in.)

Shipping Weight: 14RESA 191 kg (420 lb.)  
20RESA 243 kg (535 lb.)

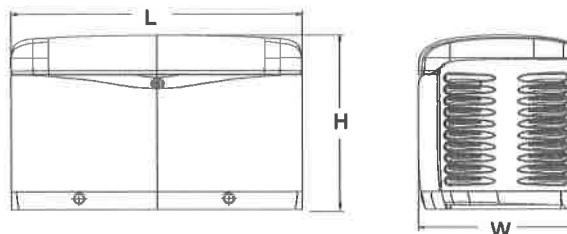

NOTE: Dimensions are provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

## DISTRIBUTED BY: